



Klik på indkøbsvognen med højre musetast

1300 watt angle grinder with brushless motor, 125 mm

L 13-10 125-EC

Order number 495.255



Technical attributes

Max. disc diameter	125 mm
No load speed	10000 rpm
Power input	1300 watt
Power output	910 watt
Tool fixture	M 14
Cable length	4,0 m
Size (W x L x H)	295 x 75 x 110 mm
Weight	2,0 kg

Standard equipment

1 guard grinding 125 Ø	436.860
1 handle	437.921
1 clamping flange	335.282
1 clamping nut M14	100.080
1 pin wrench	100.110

1300 watt angle grinder with brushless motor, 125 mm

- + Kulfri motor med større effektivitet og længere levetid
- + Styring af mikroprocessor med blød start, genbeskyttelse efter strømsvigt, temperatur overvågning, overbelastningsbeskyttelse, CDC-elektronisk feedbackkontrol
- + Anti-Kickback - dette slukker for motoren på den disk, der blokeres
- + Perfekt støvbeskyttelse takket være aftageligt beskyttende metalgitter
- + Ekstremt strømlinet håndtagssektion for perfekt håndtering
- + Mere ergonomisk håndtering på grund af skråt sidegreb
- + Ekstremt let og praktisk
- + Værktøjsfri justering af sikkerhedsafskærmning
- + Spindellås
- + Denne universelle vinkelsliber er velegnet til overfladebehandling af stål / metal, til arbejde i marken og på værkstedet / renovering såvel som karrosseri til køretøjer og byggefirmaer
- + Håndgreb i siden

Accessories

Cutting guard

Order number 437.069



Cutting guard, suitable for L / LE 9-11 125, L 12-11 125, L 13-10 125-EC, LB/LBE 17-11 125, L/LE 15-11 125, LB/LBE 125 18.0-EC.

Technical attributes

Diameter in mm	125
QTY/PKG	1

Disc guard cover

Order number 446.041




For tool-free conversion of the existing guard for cutting work.

Technical attributes

Diameter in mm	125
QTY/PKG	1

Extraction hood

Order number 445.479

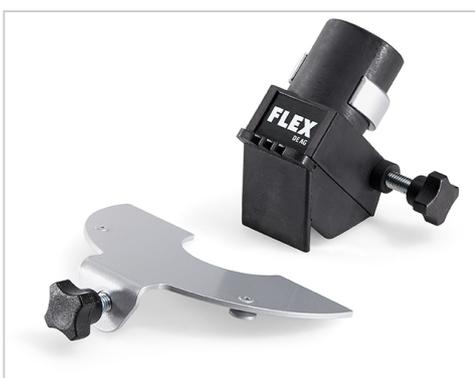

Extraction hood kit for working with cutting discs for 125 mm angle grinders. Consisting of extractor and aluminium cover. Can be fitted to the

Technical attributes

Diameter in mm	125
QTY/PKG	1

existing guard without using any tools.

Diamantjet - diamond cutting disc, standard, concrete

Order number 349.046



Fast, long-life universal cutting disc, suitable for concrete and stone

Technical attributes	
Dimensions in mm	125 Ø x 22,2
QTY/PKG	1

Diamantjet - diamond cutting disc, premium, tile

Order number 349.038




Fast, long-life tile cutting disc with closed diamond segment. Suitable for cutting all tiles, marble, slate, granite and natural stone. Precision cutting and low-noise

Technical attributes	
Dimensions in mm	125 Ø x 22,2
QTY/PKG	1



Accessories

Flap disc for metal and stainless steel, cambered

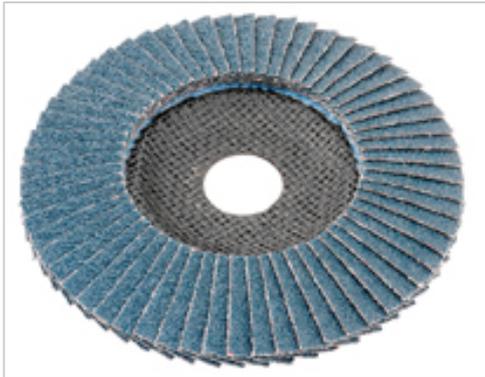

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
125 Ø x 22,2	P 60	10	349.925
125 Ø x 22,2	P 80	10	349.933

Ideal for flap-grinding metals, stainless steel, alloyed and non-alloyed steel, light metals, non ferrous metals, construction steel, to smooth welds and cast iron. Removing welding spots and beads, processing welding seams, breaking and rounding edges. High material removal rate, guarantees effortless working without filling pores.

SC-VL polishing flap wheel for metal and stainless steel, cambered

Order number 358.606



Technical attributes

Dimensions in mm	125 Ø x 22,2
Grit	medium
QTY/PKG	5

Polishing flap wheel for sanding, cleaning and finishing on stainless steel, steel, titanium alloys, light metals, non-ferrous metals and plastics. Remove any tarnish, flash rust, scale and scratches. Preparing, grinding and polishing welds.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

FixTec quick clamp nut M 14

Order number 313.459



Technical attributes

QTY/PKG	1
---------	---



For tool-less disc change, suitable for discs from Ø 115-150 mm.

Side handgrip

Order number 437.921



Technical attributes

Type	M 8
QTY/PKG	1



Handle for angle grinder, thread M 8.

Brush, steel wire 0,3 mm

Order number 124.516



Technical attributes

Dimensions in mm	60 Ø
QTY/PKG	1



Corrugated, mount M 14

Accessories

Brush, steel wire 0,5 mm

Order number 124.524



Knot-type, mount M 14

Technical attributes

Dimensions in mm	65 Ø
QTY/PKG	1

Carrying case L-BOXX®

Order number 414.085



Technical attributes


External dimensions L x W x H	442 x 357 x 151 mm
Internal dimensions L x W x H	378 x 311 x 107 mm
Weight	2,2 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert, with additional front handle.

Accessories

Case insert

Order number 414.204

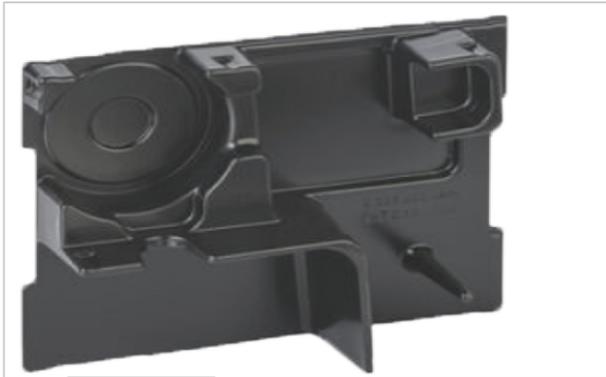

Technical attributes

QTY/PKG

1

Suitable insert for carrying case L-BOXX® 136. For all angle grinder in the actual range from 800 up to 1400 watt (except L 3406 VRG).